




3TP

微型、陶瓷管、慢熔斷

3x7mm Coated Slow Blow Micro Fuse

Sun Fuse

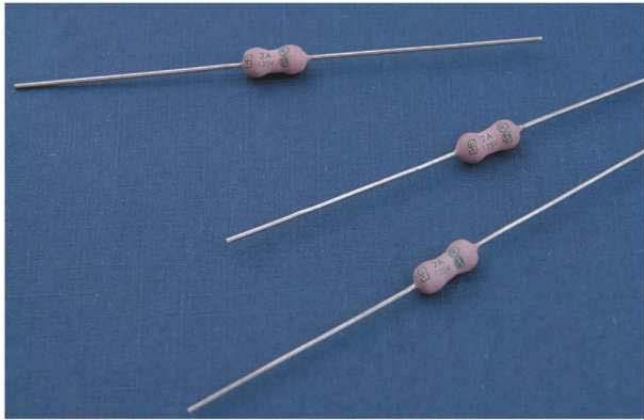

Functional Characteristics 電氣特性

Testing current 測試電流	Blow Time 熔斷時間	
	Min 最小	Max 最大
100%	4 hours	—
200%	1 s (秒)	30 s (秒)
800%	10 ms (毫秒)	100ms (毫秒)

Safety Approvals 安全認證

UL listed and CSA certified from 250mA to 5A, 125V, UL recognized and CSA component accepted from 6A to 7A, 125V. 8A-10A 125V, 0.25A-10A 250V UL pending.

Marking 印字



Sun trade mark, current rating UL/CSA logo's are printed on fuse body with black ink.

Material 材料

Fuse body - ceramic tube
End cap - nickel plated brass
Pigtail - tin plated copper on nickel plated brass cap

Packing 包裝

- Bulk pack of 1000pcs per box, or - Tape & reel of 2500pcs per reel (EIA-296, 5mm pitch, 52.4mm inside tape spacing).

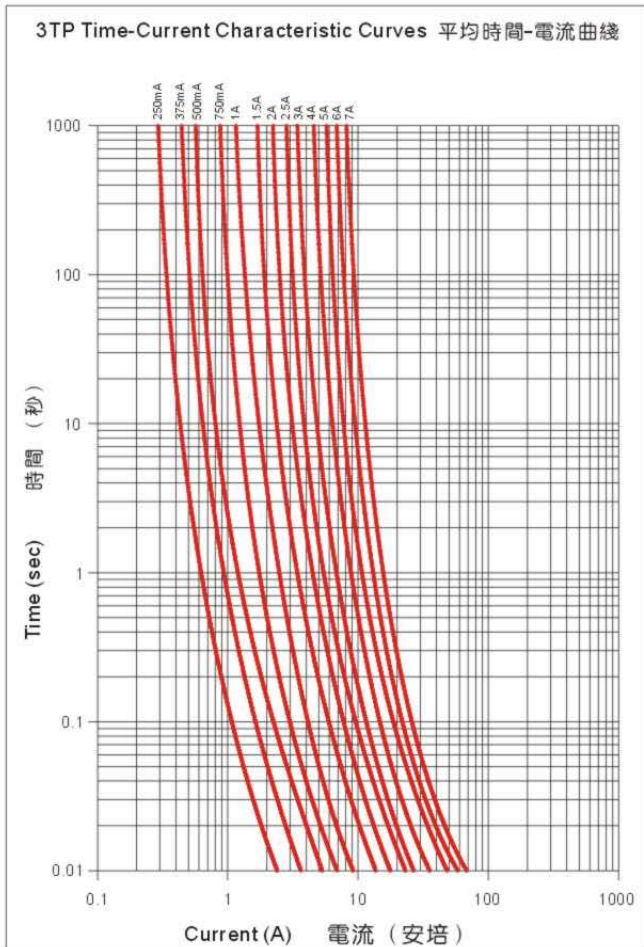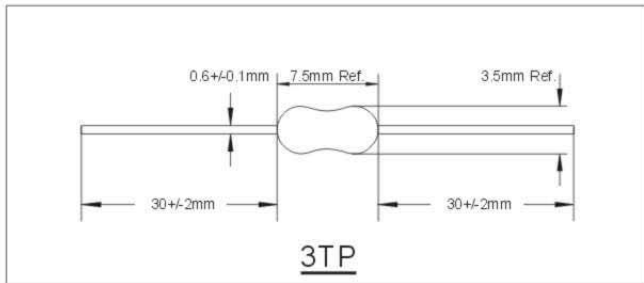

Specifications subject to change without notice

Reference Information 參考資料

Current Rating 額定電流 (A)	Voltage Rating 額定電壓 (V)	Avg Cold Resistance 平均電阻 (ohm)歐姆	Average V-drop 平均電壓降 (V)	Avg Power Dissipation 消耗功率 (w)	Average I ² t value 熔化熱能 (A ² sec)
0.250	125/250	2.76	0.85	0.21	0.06
0.375	125/250	1.30	0.62	0.23	0.13
0.500	125/250	0.78	0.51	0.26	0.28
0.750	125/250	0.36	0.37	0.28	0.48
1.0	125/250	0.24	0.29	0.29	0.84
1.25	125/250	0.18	0.26	0.33	1.36
1.5	125/250	0.12	0.23	0.35	1.88
2.0	125/250	0.075	0.20	0.40	3.14
2.5	125/250	0.048	0.18	0.44	5.35
3.0	125/250	0.037	0.16	0.48	7.15
4.0	125/250	0.024	0.14	0.54	12.6
5.0	125/250	0.018	0.12	0.60	23.3
6.0	125/250	0.014	0.11	0.66	34.0
7.0	125/250	0.012	0.10	0.70	46.4
8.0	125/250	0.010	0.09	0.72	58.1
10	125/250	0.006	0.07	0.70	70.2

Note : (備注)

- The Voltage Drop values are measured at 100% rated current.
- The Power Dissipation values are measured after 1 hour of testing at 100% rated current.
- The above figures are typical values for reference only and should not be used as acceptance criteria.
- Please consult factory for availability of other ratings.